


- NOTES:
1. All M4-9 signs along Kirkwood Blvd and 76th Ave shall be 30"x24". All M4-9 signs along 6th St and Wright Bros Blvd shall be 48"x36".
 2. All auxiliary street name signs (W16-8) connected to detour signs along Kirkwood Blvd and 76th Ave shall be 30"x8" with 4" capital letter height. Along 6th St and Wright Bros Blvd, those signs shall be 48"x12" with 6" capital letter height.
 3. Set road closure signs on Type III barricades as close as practical to construction limits to maintain access into Prairie Heights Elementary driveway.
 4. Coordinate with YMCA site contractor to allow access into their construction site.



DRAWN BY:	AMJ	ADDENDUM #1	MGJ	03/20/25
CHECKED BY:	MGJ			
APPROVED BY:	MGJ			
DATE:	03/25/2025			
FIELD BOOK:	NO.	REVISION DESCRIPTION	APPROVED	DATE

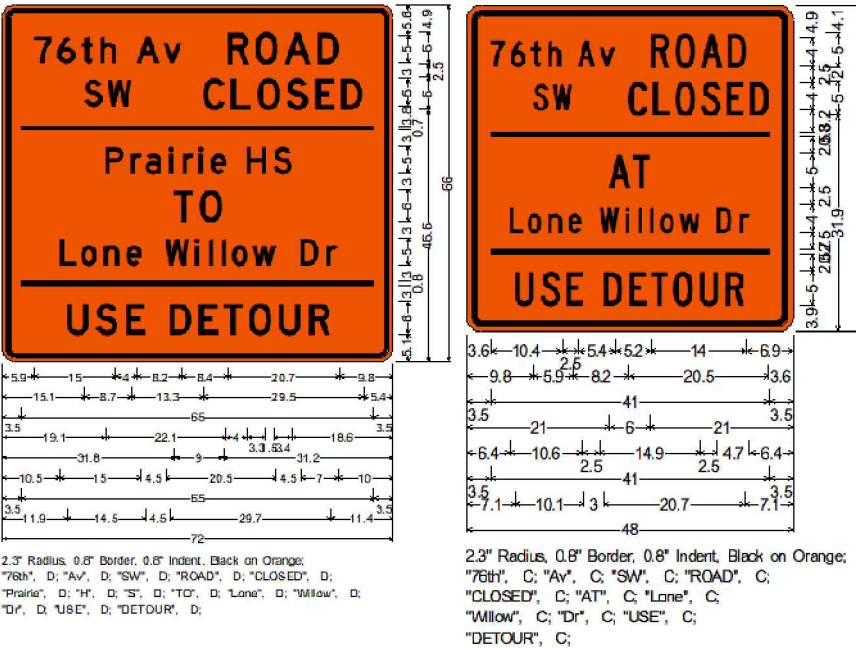

HALL & HALL ENGINEERS, INC.
Leaders in Land Development Since 1953
1860 Boyson Rd. ● CIVIL ENGINEERING
Hiawatha, IA 52233 ● LAND SURVEYING
(319) 362-9548 ● LANDSCAPE ARCHITECTURE
www.halleng.com ● LAND DEVELOPMENT PLANNING

76TH AVENUE SW & LONE WILLOW DRIVE
SW IMPROVEMENTS
IN THE CITY OF CEDAR RAPIDS, LINN COUNTY, IOWA

STAGING AND TRAFFIC CONTROL PLAN -
PHASE 3
PROJECT NO: 10466-23

SHEET
1.03